


ARIA 3543 DR

RADIOLOGY, SMARTER THAN EVER

WITHOUT ARIA

POWERED BY ARIA

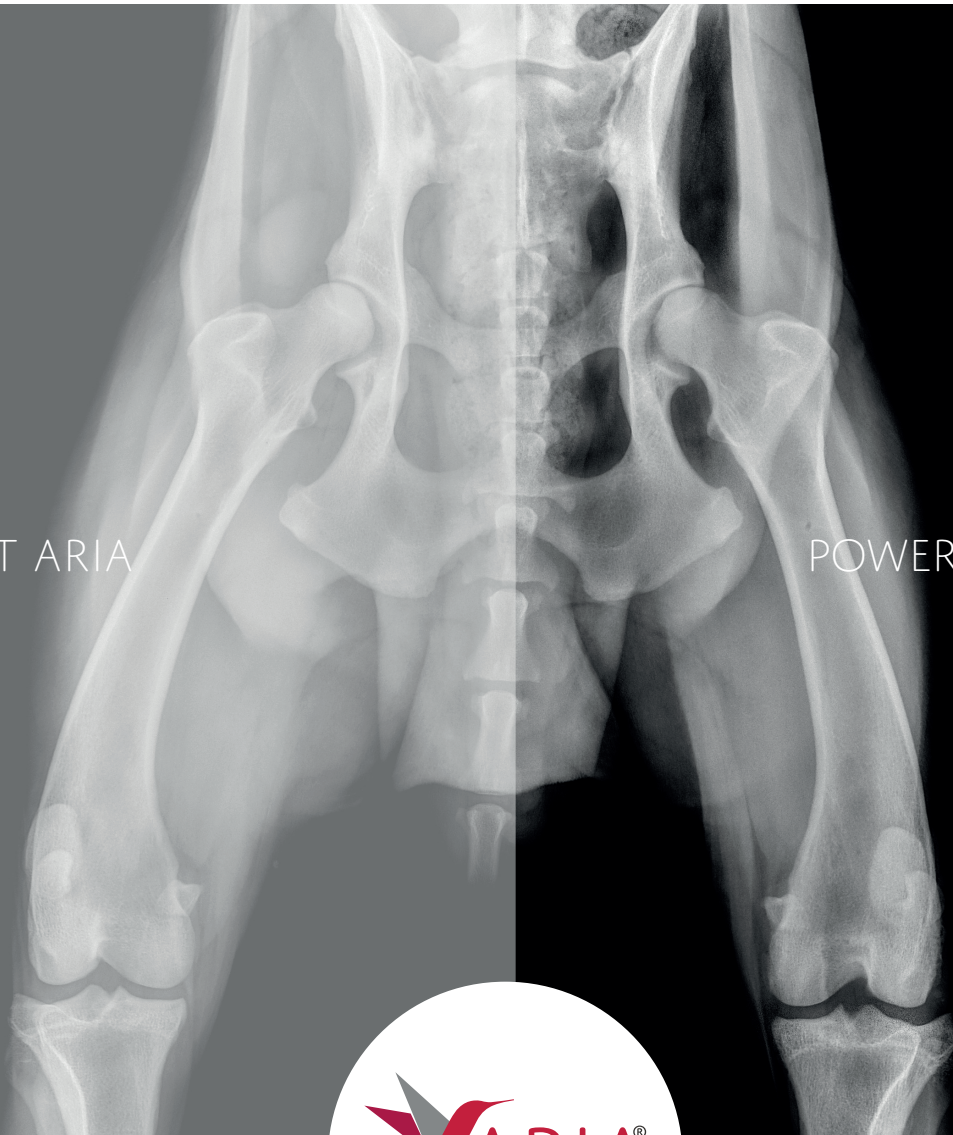

14X17" WIRELESS
FLAT PANEL DETECTOR

ARIA 3543 DR

Optimal ergonomics & unlimited flexibility

The ARIA DR product range is synonymous with high performance and reduced exposure and the latest product in the line, the portable ARIA 3543 DR, features the most state-of-the-art performance levels of any portable flat panel detectors on the market.

Produced by the Leading French Company, Thales, this flat panel weighs only 3,1 kg and features a unique border-less design for extreme mobility and flexibility. This last generation panel can be used either in wired mode, inside the bucky tray, but is also wifi-enabled and can therefore be removed to ensure versatility for all exam types and maximise your workflow from the x-ray room, to the surgery room or ICU.

With its 35x43 "cassette-size", the detector fits into any standard bucky tray on the market. When positioned inside the bucky tray, the panel operates in wired mode through the magnetic power cable, while charging the battery. In case of disconnection of the magnetic cable, the panel self-configures in Wi-Fi mode for use in other environments. The internal NFC sensor also allows you to quickly change the Wi-Fi settings when used in particularly large spaces.

These features make this product unique in diagnostic performance and flexibility, allowing to quickly share images and improving streamlining veterinary hospital operations and making it an ideal solution for mixed practice activity.

THALES




| | |
|-------------------------------|-------------------------|
| Code | 00005642 |
| Detection Area | 35x43 cm |
| Scintillator | CsI |
| Connection | Wi-Fi e Cable |
| Dimensions (W x L x D) | 383.5 x 459.5 x 15.0 mm |
| Pixel | 2156x2664 |
| Pixel Pitch | 160 µm |
| AD conversion | 16 bit |
| Dqe @ 0 Lp/Mm_2 µgy | > 70% |
| Acquisition time | < 3 sec |
| Storage mode | YES |
| Weight | 3,1 kg |

DR ARIA 3543_EN v. 2018.10_Rev.01

ARIA 3543 DR CONFIGURATION


Ethernet Interface 1.000 Base - T with RJ45

Configuration 1

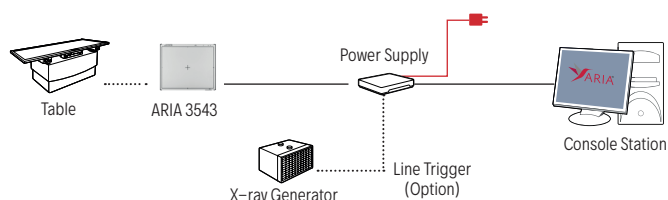

Wireless Interface IEEE 802.11n(2.4GHz/5GHz) Dual bandwidth

Configuration 2

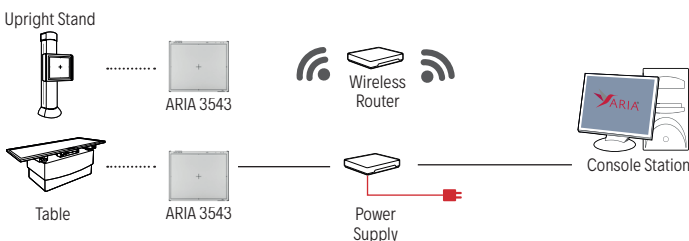

CONTACT US FOR A FREE DEMO

**Request a FREE demo of 'ARIA 3543' Panel
at orders@foschigroup.com or call +39 06 417 905 800**

